



Cup Elevators

02

Cup Elevator with capacity up to 2000 pieces/hour. Weight range between 100-1500 grams.

FOR WHO?

Bakeries.
Semi-Industrial Bakeries.

WHY CE100?





Photocell



Easy to clean



MEASUREMENTS AND DRAWINGS [MM]

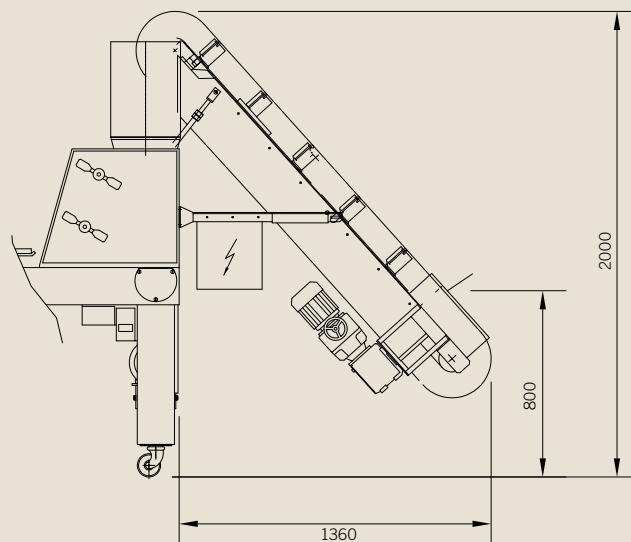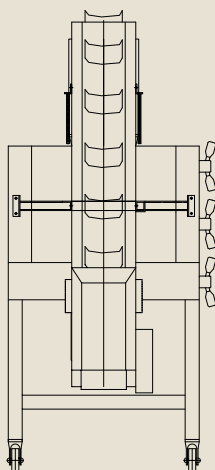

Cup Elevator

CE100

A step-by-step elevator for transporting dough pieces from Rounder into the Moulder type MO300.

FEATURES AND BENEFITS

- Capacity up to 2000 pieces/hour.
- Elevator mounted on MO300.
- The conveyor belt, 200 mm wide, has riveted cups on every 300 mm.
- The timing of each dough piece is controlled by a photocell.
- The infeed hopper guides the dough piece into an empty cup.

MODELS

CE100

TECHNICAL

Capacity range	up to 2000 pieces/hour.
Weight range	100-1500 g. (subject to capacity and dough characteristics when sold separately)
Mounting height	2000-2040 mm.
Power supply	0.25 kW.

04

Cup Elevator with capacity up to 2000 pieces/hour. Weight range between 100-1500 grams.

FOR WHO?

Bakeries.
Semi-Industrial Bakeries.

WHY CE300?




Photocell



Flexible Design



MEASUREMENTS AND DRAWINGS [MM]

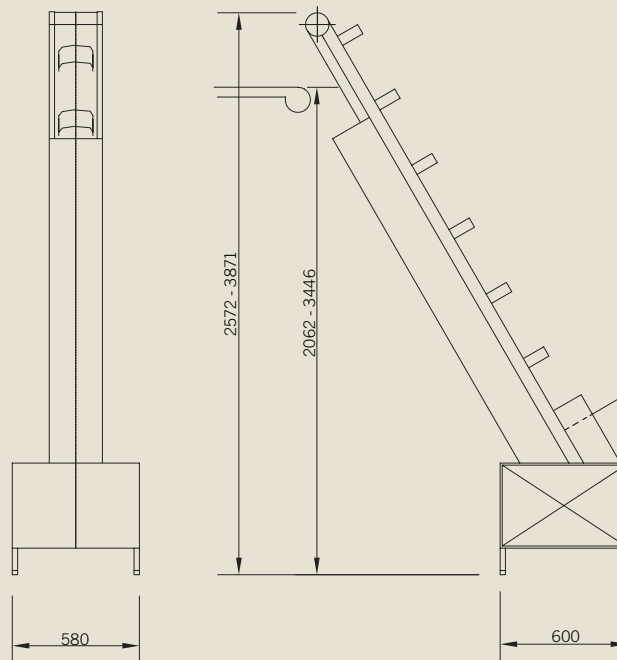

Cup Elevator

CE300

A step-by-step elevator for transporting dough pieces from Rounder up to the Intermediate Conveyor Proofer.

FEATURES AND BENEFITS

Capacity up to 2 000 pieces/hour.

The conveyor belt, 200 mm wide, has riveted cups on every 300 mm.

The timing of each dough piece is controlled by a photocell.

The infeed hopper guides the dough piece into an empty cup.

MODELS

CE300 - With control cabinet for CE300.

CE300 - With control cabinet for CE300 and ICP.

TECHNICAL

Capacity range	up to 2000 pieces/hour.
Weight range	100-1500 g.
	(subject to capacity and dough characteristics)
Distributing height	3500 mm.
Power supply	0.55 kW.

06

Cup Elevator with capacity up to 3600 pieces/hour. Weight range between 100-1500 grams.

FOR WHO?

Industrial Bakeries

WHY CE500?



Photocell



Flexible Design




Easy to clean



MEASUREMENTS AND DRAWINGS [MM]

A-DISTRIBUTING HEIGHT (MM)	B-TOTAL HEIGHT (MM)	NUMBER OF CUPS
1959-2070	2519-2630	18
2070-2192	2630-2752	19
2192-2315	2752-2875	20
2315-2438	2875-2998	21
2438-2560	2998-3120	22
2560-2684	3120-3244	23
2684-2806	3244-3366	24
2806-2928	3366-3488	25
2928-3052	3488-3612	26
3052-3174	3612-3734	27
3174-3297	3734-3857	28
3297-3420	3857-3980	29
3420-3543	3980-4103	30
3543-3665	4103-4225	31
3665-3776	4225-4336	32
3776-3897	4336-4457	33

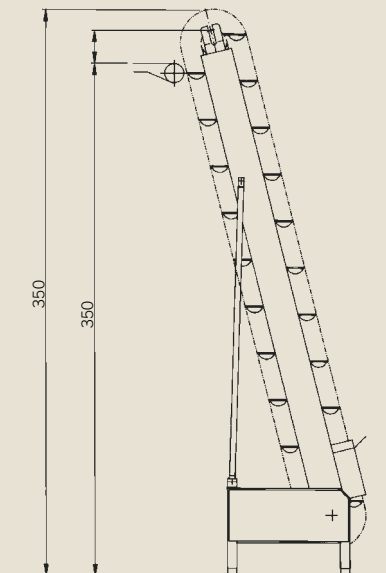

Heavy-duty Cup Elevator

CE500

A step-by-step vertical belt elevator for transporting the dough piece from the Rounder into the Intermediate Conveyor Proofer. A heavy-duty elevator made in stainless steel for use in industrial bakeries or where high vertical transportation is required.

FEATURES AND BENEFITS

Capacity up to 3600 pieces/hour.

Riveted cups on every 300 mm.

Width of cups: 160 mm.

The timing of each dough piece is controlled by a photocell.

The infeed hopper guides the dough piece into an empty cup.

Additional distributing height (option).

Distribution height above 3897 mm (=33 cups), price on request.

Stainless steel execution.

OPTIONS

Price per cup over 24 pcs.

Additional distributing height.

TECHNICAL

Capacity range up to 3600 pieces/hour.

Weight range 100-1500 g.
(subject to capacity and dough characteristics)

Max Distributing height, 24 cups 2806 mm.

Max Distributing height, 33 cups 3897 mm (option).

Power supply 0.75 kW.

MODELS

CE500 - With control cabinet for CE500.

CE500 - With control cabinet for CE500 and ICP.

Our story

We provide customized baking solutions, dough handling equipment systems and complete bread lines for professional baking businesses.

We offer reliable technology with precision control and flexibility regarding weights and types of dough and also user-friendly design that gives baking professionals creative freedom at the lowest cost of ownership.

Sveba Dahlen AB
Industrivägen 8
513 82 Fristad, Sweden
www.sveba-dahlen.com
info@glimek.com

